


DS-2CC1181P(N)(-A)


600 TVL High Definition Box Camera

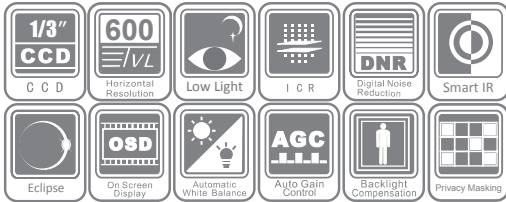

Key features

- 1/3" SONY CCD
- 600 TVL Horizontal Resolution
- True Day/Night (DS-2CC1181P(N)-A)
- OSD Menu
- DNR, Digital WDR
- 12 VDC / 24 VAC (DS-2CC1181P(N)-A)

Dimensions

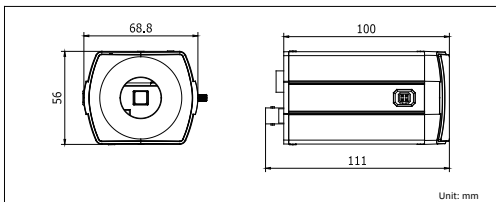

Accessories



	DS-2CC1181P(N)-A	DS-2CC1181P(N)
Camera		
Image sensor	1 / 3" SONY CCD	
Signal system	PAL / NTSC	
Effective pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
Min. illumination	Color: 0.001 Lux @ (F1.2, AGC ON) B/W: 0.0001 Lux @ (F1.2, AGC ON)	0.001 Lux @ (F1.2, AGC ON)
Shutter time	PAL: 1 / 50 s to 1 / 10,000 s NTSC: 1 / 60 s to 1 / 10,000 s	
Lens mount	C / CS mount	
Auto iris	DC drive	
Day & night	IR cut filter with auto switch	Electronic
Horizontal resolution	600TVL (Color), 650 TVL (B/W)	600TVL
Synchronization	Internal/Power synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC)	
S / N ratio	More than 62dB	
Menu		
Camera ID	On / Off (52 letters, position adjustable)	
D / N Mode	Auto / Day / Night / EXT1 / EXT2	Auto / Day / Night
White Balance	ATW / Push / User1 / User2 / ANTI CR / Manual / Push lock	
Privacy Masking	On / Off, maximum 8 zones	
Motion Detection	On / Off	
Back Light	BLC / HLC / Off	
Language	Chinese / English / Japanese / German / French / Russian / Portuguese / Spanish	
Function	SMART IR, ATR, HLC, DNR, Sharpness, Brightness, Contrast, Hue, Gain, Mirror, Defect Pixel Correction	ATR, HLC, DNR, Sharpness, Brightness, Contrast, Hue, Gain, Mirror, Defect Pixel Correction
General		
Working Temperature/Humidity	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)	
Power supply	24 VAC ± 10%, 12 VDC ± 10%	12 V DC ± 10%
Power consumption	Max. 2 W (Max. 4 W with IR cut filter on)	Max. 2 W
Dimensions	68.8 × 56 × 111 mm (2.71" × 2.20" × 4.37")	
Weight	400 g (0.88 lbs)	

Available models

PAL: DS-2CC1181P-A, DS-2CC1181P
NTSC: DS-2CC1181N-A, DS-2CC1181N