

# MD785 / MD785G

DMR mobile radios

The MD785 and MD785G DMR mobile radios offer versatile digital functions that allow you to exchange information in all types of situations. With their ergonomic design, easy-to-operate user interface and remarkable quality, they are the ideal solution for your communication requirements; regardless of whether you are aiming to optimize the efficiency of your company or be able to respond to emergency situations at all times.



[www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Aecom® | Industrieweg 38 | 4301RS Zierikzee | Netherlands  
T + 31 (0) 111 406220 | F + 31 (0) 111 406187 | Mail: [info@aecom.nl](mailto:info@aecom.nl)

[www.aecom.nl](http://www.aecom.nl)

# Radio

## MD785 MD785G

DMR mobile radios



### Highlights

#### Excellent voice transmission

Thanks to the simultaneous application of narrow band codecs and digital error correction, the MD785/MD785G offers you outstanding audio quality in loud environments and in boundary regions of the radio coverage.

#### Dual mode

The MD785/MD785G features an analog as well as a digital mode and is compatible with the currently used analog systems, thereby simplifying your transition into the digital age.

#### Improved use of the radio spectrum

Thanks to the TDMA process, the MD785/MD785G enables you to assign the available bandwidth with double channel capacity. This has a clear mitigating effect on increasing spectrum scarcity.

#### Digital encryption

Encryption using encryption algorithm ARC4 (40 bit) in accordance with DMRA or optional algorithms AES128 and AES256 (128 and 256 bit) ensures secure communication.

#### Reliability and quality

The MD785/MD785G complies with the standards MIL-STD-810 C/D/E/F/G and meets the IP54 degree of protection. A high degree of reliability is assured even in harsh environments.

#### Versatile functionality

Besides the traditional communication functions, the MD785/MD785G features numerous digital and optional functions, including text messages, GPS location determination and a lone worker function.

#### Expansion interface

Thanks to the expansion interface, the range of functions offered by the MD785/MD785G can be expanded to include key functions. Accessories and applications developed by partners can be connected to this interface.

#### Intuitive interface and key guidance

The high-resolution LCD screen offers a clear display, even under difficult light conditions. The large keyboard and ergonomic programmable keys facilitate efficient and productive communication.

#### Upgradeable software

Upgradeable software makes the use of new features possible. By altering the firmware-software, other digital and analog operating modes can be enabled, without the need for purchasing a new radio device.



## Functions (excerpt)

### Versatile voice communication

Thanks to digital signal transmission, the MD785/MD785G allows you to carry out different types of voice communication, including individual calls, group calls and simultaneous communication with all subscribers.

### Data services

The MD785/MD785G offers you data services, such as sending text and group messages.

### GPS (MD785G)

The MD785G supports GPS location determination and allows GPS location data to be sent as a text message. In addition, the distance and position of other GPS-enabled radios in the DMR radio system can be detected.

### Roaming

The MD785/MD785G allows automatic cell re-selection (roaming) at all sites in multi-site systems.

### Supplementary services

With the MD785/MD785G, you can utilize various services, such as radio check, remote monitor and call alert.

### Various analog signaling types

The MD785/MD785G enables you to use selective calls, HDC1200 and CTCSS/CDCSS.

### Different menu languages

e.g. German, English, French, Spanish, Polish, Italian, Russian, Turkish, simplified and traditional Chinese, Korean.

### Emergency call


The MD785/MD785G offers you several emergency call options, such as the concealed emergency call.

### Powerful loudspeaker

For a clear audio output, the MD785/MD785G features a powerful 5-watt loudspeaker.



## Standard accessories

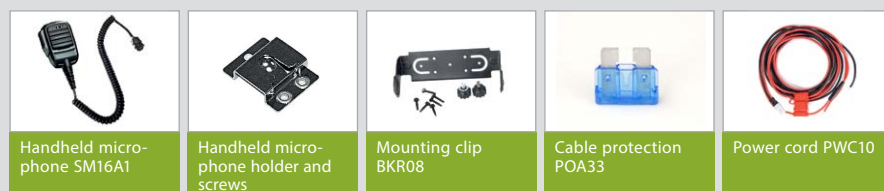

## Optional accessories (excerpt)



The illustrations below are for reference purposes only. The products might differ from these illustrations.

## Technical Data

General data	
Frequency range	VHF: 136 - 174 MHz UHF: 400 - 470 MHz
Supported operating modes	<ul style="list-style-type: none"> <li>DMR Tier II in acc. with ETSI TS 102 361-1/2/3</li> <li>Simulcast</li> <li>DMR Tier III in acc. with ETSI TS 102 361-1/2/3/4</li> <li>Analog, MPT 1327</li> </ul>
Channel capacity	1024
Zone capacity	64 (with max. 16 channels each)
Channel spacing	12.5 / 20 / 25 kHz (analog) 12.5 kHz (digital)
Operating voltage	13.6 ± 15% V <sub>DC</sub>
Max. power consumption (in stand by)	≤ 0.6 A
Max. power consumption (during reception)	≤ 2.0 A
Max. power consumption (during transmission)	5 W: ≤ 5 A 25 W: ≤ 8 A 45 W/50 W: ≤ 12 A
Frequency stability	± 1.5 ppm
Antenna impedance	50 Ω
Dimensions (W × H × L)	174 × 60 × 200 mm
Weight	1.7 kg
LCD display	220 × 176 pixel, 262,000 colors, 2.0 inch, 4 lines

Ambient data	
Operating temperature range	- 30 °C to + 60 °C
Storage temperature range	- 40 °C to + 85 °C
Dust and water protection	IP54
Shock and vibration resistance	MIL-STD-810 C/D/E/F/G
Relative humidity	MIL-STD-810 C/D/E/F/G

GPS (MD785G)	
Time to first fix (TTFF) cold start	< 1 minute
Time to first fix (TTFF) warm start	< 10 seconds
Horizontal accuracy	< 10 meters


Transmitter	
Transmitting power	5 – 25 W (adjustable) 1 – 25 W* (adjustable)
Modulation	11 KΦF3E at 12.5 kHz 14 KΦF3E at 20 kHz 16 KΦF3E at 25 kHz
4FSK digital modulation	12.5 kHz (data only): 7K6ΦFXD 12.5 kHz (data and voice): 7K6ΦFXW
Interfering signals and harmonics	-36 dBm (< 1 GHz) -30 dBm (> 1 GHz)
Modulation limiting	± 2.5 kHz at 12.5 kHz ± 4.0 kHz at 20 kHz ± 5.0 kHz at 25 kHz
Hum and noise	40 dB at 12.5 kHz 43 dB at 20 kHz 45 dB at 25 kHz
Adjacent channel selectivity	60 dB at 12.5 kHz 70 dB at 20 / 25 kHz
Audio sensitivity	+ 1 to - 3 dB
Nominal audio distortion	≤ 3 %
Digital vocoder type	AMBE++

Receiver	
Sensitivity (analog)	0.3 μV (12 dB SINAD) 0.22 μV (typical) (12 dB SINAD) 0.4 μV (20 dB SINAD)
Sensitivity (digital)	0.3 μV / BER 5 %
Adjacent channel selectivity TIA-603 ETSI	65 dB at 12.5 kHz / 75 dB at 20 / 25 kHz 60 dB at 12.5 kHz / 70 dB at 20 / 25 kHz
Spurious response rejection TIA-603 ETSI	75 dB at 12.5 / 20 / 25 kHz 75 dB at 12.5 / 20 / 25 kHz
Signal-to-noise ratio (S/N)	40 dB at 12.5 kHz 43 dB at 20 kHz 45 dB at 25 kHz
Nominal audio power output	Internal 3 W at 20 Ω, external 7.5 W at 8 Ω
Nominal audio distortion	≤ 3 %
Audio sensitivity	+ 1 to - 3 dB
Conducted spurious emission	- 57 dBm

The features marked with \* will be available in future versions of the MD785/MD785G.

All technical specifications were tested according to the relevant standards. Subject to change on the basis of continuous development.

Your Hytera partner:

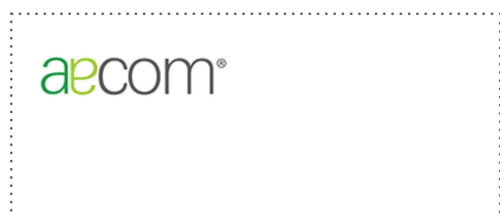

### Hytera Mobilfunk GmbH

**Address:** Fritz-Hahne-Strasse 7, 31848 Bad Münder, Germany  
**Tel.:** + 49 (0)5042 / 998-0 **Fax:** + 49 (0)5042 / 998-105  
**E-mail:** info@hytera.de | [www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Aecom® | Industrieweg 38 | 4301RS Zierikzee | Netherlands  
T + 31 (0) 111 406220 | F + 31 (0) 111 406187 | Mail: info@aecom.nl

[www.aecom.nl](http://www.aecom.nl)

Further information can be found at:

[www.hytera-mobilfunk.com](http://www.hytera-mobilfunk.com)

Contact us if you are interested in purchasing, sales or application partnerships:

✉ [info@hytera.de](mailto:info@hytera.de)



SGS certificate DE11/81829313

Hytera Mobilfunk GmbH reserves the right to modify the product design and the specifications. In case of a printing error, Hytera Mobilfunk GmbH does not accept any liability. All specifications subject to change without notice.

Encryption features are optional and have to be configured separately; they also are subject to German and European export regulations.

**HYT** Hytera® are registered trademarks of Hytera Co. Ltd. ACCESSNET® and all derivatives are protected trademarks of Hytera Mobilfunk GmbH. © 2014 Hytera Mobilfunk GmbH. All rights reserved.